

TENSION TOOLS

CLASS C COMPONENTS

6825 SUNWOOD DRIVE N.W. RAMSEY, MN 55303
PH 763-535-0400 FAX 763-535-1400



ISO 9001 Certified Company
www.classccomponents.com
Quality • Service • Versatility

ACT

ADVANCED CABLE TIES, INC.



AL-100



AL-300



AL-200



AL-900

CABLE TIE INSTALLATION/TENSION TOOLS


Quickly tension and automatically cut off excess strap with no sharp protrusions to cause snags, cuts, or abrasions to cables, hoses, products, or users

- **A-100** Cost effective, lightweight durable tool saves time. Tie rating: 18-50lb / 80-222n
- **A-200** Adjustable bundle tension avoids under or over tightening
Produces consistent tension from tie to tie
- **A-300** Durable tension and cut off tool designed for larger cable ties (120 lb & 175 lb)
- **A-900** Stainless Steel cable tie installation tool eliminates extremely sharp metal protrusions and produces consistent tension from tie to tie

Related product lines



Standard
Cable Ties



Mounting Bases



Removal Tools

ACT
ADVANCED CABLE TIES, INC.



TENSION TOOLS

CLASS C COMPONENTS

6825 SUNWOOD DRIVE N.W. RAMSEY, MN 55303
PH 763-535-0400 FAX 763-535-1400



ISO 9001 Certified Company
www.classccomponents.com
Quality • Service • Versatility

ACT

ADVANCED CABLE TIES, INC.

OPERATING INSTRUCTIONS



AL-100

Manual Twist Off

Cinch cable tie around items to approximate bundle diameter.
Insert exposed cable tie strap into side of tension tool.
Squeeze trigger and hold until desired bundle tension is reached
and twist the tension tool clockwise and then counterclockwise
until cable tie strap is cut off.



AL-200

Automatic Flush Cut Off


Recommended Cable Ties - 18 lb through 50 lb
Tension Setting - 1 is the lowest bundle tension
3 is the highest bundle tension.
Cinch cable tie around items to approximate bundle diameter.
Insert exposed cable tie strap into side of tension tool.
Squeeze trigger until cable tie strap is cut off.



AL-300

Manual Flush Cut Off

Cinch cable tie around items to approximate bundle diameter.
Insert exposed cable tie strap into the slot by the cutting blade from
the top down through the tip of the gun.
Squeeze the two larger handles together until desired bundle tension
is reached.
Continue holding the two larger handles together and squeeze the
cutting handle until the tie strap is cut off.

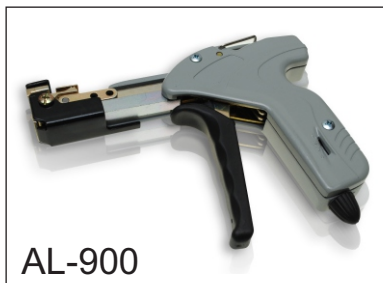

AL-900

Automatic Flush Cut Off

Tie Rating: 100 to 300 lb Stainless Steel
Tension Setting - 0 is the lowest bundle tension
3 is the highest bundle tension.
Cinch cable tie around items to approximate bundle diameter.
Insert exposed cable tie strap into side of tension tool.
Squeeze trigger until cable tie strap is cut off.

ACT
ADVANCED CABLE TIES, INC.

