

STANDARD CABLE TIES

CLASS C COMPONENTS


6825 SUNWOOD DRIVE N.W. RAMSEY, MN 55303
PH 763-535-0400 FAX 763-535-1400



ISO 9001 Certified Company
www.classccomponents.com
Quality • Service • Versatility

ACT

ADVANCED CABLE TIES, INC.

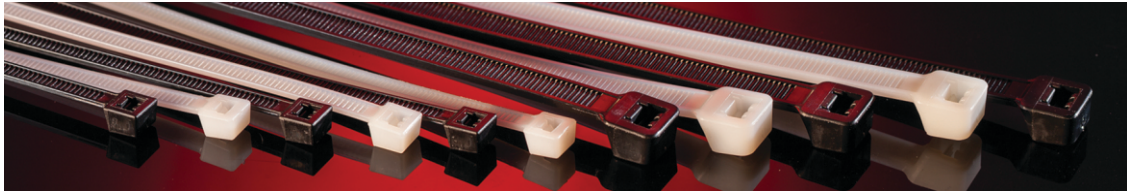

STANDARD CABLE TIES

Available in lengths from 4" up to 48",
with loop tensile strengths ranging from 18 lbs to 250 lbs

- Mil-Spec certified and listed on the Qualified Products List
- Approved to the highest UL classifications
- Three-tooth pawl design locks tie in 3 places along serrated side offering the highest strength possible
- Stay tab maintains closed loop without locking



MINIATURE CABLE TIES - 18 lb

Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-04-18-9-C	Natural	Nylon 66	4.12/104.77	0.09/2.41	0.04/1.06	0.87/22.22	18/80	-40 to 185	MS3367-4-9	Type 21	Type 21	AH-2	100	10,000
AL-04-18-9-M	Natural	Nylon 66	4.12/104.77	0.09/2.41	0.04/1.06	0.87/22.22	18/80	-40 to 185	MS3367-4-9	Type 21	Type 21	AH-2	1,000	10,000
AL-04-18-0-C	UV Black	Nylon 66	4.12/104.77	0.09/2.41	0.04/1.06	0.87/22.22	18/80	-40 to 185	MS3367-4-0	Type 21	Type 21	AH-2	100	10,000
AL-04-18-0-M	UV Black	Nylon 66	4.12/104.77	0.09/2.41	0.04/1.06	0.87/22.22	18/80	-40 to 185	MS3367-4-0	Type 21	Type 21	AH-2	1,000	10,000
AL-06-18-9-C	Natural	Nylon 66	6.18/157.14	0.09/2.41	0.04/1.06	1.5/38.10	18/80	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-06-18-9-M	Natural	Nylon 66	6.18/157.14	0.09/2.41	0.04/1.06	1.5/38.10	18/80	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000
AL-06-18-0-C	UV Black	Nylon 66	6.18/157.14	0.09/2.41	0.04/1.06	1.5/38.10	18/80	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-06-18-0-M	UV Black	Nylon 66	6.18/157.14	0.09/2.41	0.04/1.06	1.5/38.10	18/80	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000
AL-08-18-9-C	Natural	Nylon 66	8.18/207.94	0.09/2.41	0.04/1.06	2.18/55.55	18/80	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-08-18-9-M	Natural	Nylon 66	8.18/207.94	0.09/2.41	0.04/1.06	2.18/55.55	18/80	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000
AL-08-18-0-C	UV Black	Nylon 66	8.18/207.94	0.09/2.41	0.04/1.06	2.18/55.55	18/80	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-08-18-0-M	UV Black	Nylon 66	8.18/207.94	0.09/2.41	0.04/1.06	2.18/55.55	18/80	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000

Related product lines



MG-1300
Removal Tool



Color Cable Ties



Mounting Hole
Cable Ties

ACT
ADVANCED CABLE TIES, INC.



STANDARD CABLE TIES

CLASS C COMPONENTS

6825 SUNWOOD DRIVE N.W. RAMSEY, MN 55303
PH 763-535-0400 FAX 763-535-1400



ISO 9001 Certified Company
www.classccomponents.com
Quality • Service • Versatility



ADVANCED CABLE TIES, INC.

INTERMEDIATE CABLE TIES - 40 lb



Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-05-40-9-C	Natural	Nylon 66	5.84/148.33	0.14/3.55	0.04/1.24	1.43/36.42	40/178	-40 to 185	MS3367-5-9	Type 21	Type 21	AH-2	100	10,000
AL-05-40-9-M	Natural	Nylon 66	5.84/148.33	0.14/3.55	0.04/1.24	1.43/36.42	40/178	-40 to 185	MS3367-5-9	Type 21	Type 21	AH-2	1,000	10,000
AL-05-40-0-C	UV Black	Nylon 66	5.84/148.33	0.14/3.55	0.04/1.24	1.43/36.42	40/178	-40 to 185	MS3367-5-0	Type 21	Type 21	AH-2	100	10,000
AL-05-40-0-M	UV Black	Nylon 66	5.84/148.33	0.14/3.55	0.04/1.24	1.43/36.42	40/178	-40 to 185	MS3367-5-0	Type 21	Type 21	AH-2	1,000	10,000
AL-08-40-9-C	Natural	Nylon 66	8.87/225.42	0.14/3.55	0.04/1.24	2.37/60.32	40/178	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-08-40-9-M	Natural	Nylon 66	8.87/225.42	0.14/3.55	0.04/1.24	2.37/60.32	40/178	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000
AL-08-40-0-C	UV Black	Nylon 66	8.87/225.42	0.14/3.55	0.04/1.24	2.37/60.32	40/178	-40 to 185		Type 21	Type 21	AH-2	100	10,000
AL-08-40-0-M	UV Black	Nylon 66	8.87/225.42	0.14/3.55	0.04/1.24	2.37/60.32	40/178	-40 to 185		Type 21	Type 21	AH-2	1,000	10,000
AL-11-40-9-C	Natural	Nylon 66	10.96/278.58	0.14/3.55	0.05/1.37	3.37/85.72	40/178	-40 to 185		Type 21	Type 21	AH-2	100	5,000
AL-11-40-9-D	Natural	Nylon 66	10.96/278.58	0.14/3.55	0.05/1.37	3.37/85.72	40/178	-40 to 185		Type 21	Type 21	AH-2	500	5,000
AL-11-40-0-C	UV Black	Nylon 66	10.96/278.58	0.14/3.55	0.05/1.37	3.37/85.72	40/178	-40 to 185		Type 21	Type 21	AH-2	100	5,000
AL-11-40-0-D	UV Black	Nylon 66	10.96/278.58	0.14/3.55	0.05/1.37	3.37/85.72	40/178	-40 to 185		Type 21	Type 21	AH-2	500	5,000
AL-14-40-9-C	Natural	Nylon 66	14.25/361.95	0.14/3.55	0.05/1.37	4.00/101.60	40/178	-40 to 185		Type 21	Type 21	AH-2	100	5,000
AL-14-40-9-D	Natural	Nylon 66	14.25/361.95	0.14/3.55	0.05/1.37	4.00/101.60	40/178	-40 to 185		Type 21	Type 21	AH-2	500	5,000
AL-14-40-0-C	UV Black	Nylon 66	14.25/361.95	0.14/3.55	0.05/1.37	4.00/101.60	40/178	-40 to 185		Type 21	Type 21	AH-2	100	5,000
AL-14-40-0-D	UV Black	Nylon 66	14.25/361.95	0.14/3.55	0.05/1.37	4.00/101.60	40/178	-40 to 185		Type 21	Type 21	AH-2	500	5,000

STANDARD CABLE TIES - 50 lb



Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-07-50-9-C	Natural	Nylon 66	7.56/192.07	0.18/4.57	0.05/1.32	1.87/47.62	50/222	-40 to 185	MS3367-1-9	Type 21S	Type 21S	AH-2	100	10,000
AL-07-50-9-M	Natural	Nylon 66	7.56/192.07	0.18/4.57	0.05/1.32	1.87/47.62	50/222	-40 to 185	MS3367-1-9	Type 21S	Type 21S	AH-2	1,000	10,000
AL-07-50-0-C	UV Black	Nylon 66	7.56/192.07	0.18/4.57	0.05/1.32	1.87/47.62	50/222	-40 to 185	MS3367-1-0	Type 21S	Type 21S	AH-2	100	10,000
AL-07-50-0-M	UV Black	Nylon 66	7.56/192.07	0.18/4.57	0.05/1.32	1.87/47.62	50/222	-40 to 185	MS3367-1-0	Type 21S	Type 21S	AH-2	1,000	10,000
AL-11-50-9-C	Natural	Nylon 66	11.25/285.75	0.18/4.57	0.05/1.32	3.06/77.77	50/222	-40 to 185	MS3367-7-9	Type 21S	Type 21S	AH-2	100	5,000
AL-11-50-9-D	Natural	Nylon 66	11.25/285.75	0.18/4.57	0.05/1.32	3.06/77.77	50/222	-40 to 185	MS3367-7-9	Type 21S	Type 21S	AH-2	500	5,000
AL-11-50-0-C	UV Black	Nylon 66	11.25/285.75	0.18/4.57	0.05/1.32	3.06/77.77	50/222	-40 to 185	MS3367-7-0	Type 21S	Type 21S	AH-2	100	5,000
AL-11-50-0-D	UV Black	Nylon 66	11.25/285.75	0.18/4.57	0.05/1.32	3.06/77.77	50/222	-40 to 185	MS3367-7-0	Type 21S	Type 21S	AH-2	500	5,000
AL-14-50-9-C	Natural	Nylon 66	14.35/364.49	0.18/4.57	0.05/1.32	4.00/101.60	50/222	-40 to 185	MS3367-2-9	Type 21S	Type 21S	AH-2	100	5,000
AL-14-50-9-D	Natural	Nylon 66	14.35/364.49	0.18/4.57	0.05/1.32	4.00/101.60	50/222	-40 to 185	MS3367-2-9	Type 21S	Type 21S	AH-2	500	5,000
AL-14-50-0-C	UV Black	Nylon 66	14.35/364.49	0.18/4.57	0.05/1.32	4.00/101.60	50/222	-40 to 185	MS3367-2-0	Type 21S	Type 21S	AH-2	100	5,000
AL-14-50-0-D	UV Black	Nylon 66	14.35/364.49	0.18/4.57	0.05/1.32	4.00/101.60	50/222	-40 to 185	MS3367-2-0	Type 21S	Type 21S	AH-2	500	5,000
AL-17-50-9-C*	Natural	Nylon 66	17.87/454.02	0.18/4.69	0.05/1.39	5.08/129.00	50/220	-40 to 185		Type 21S		AH-2	100	5,000
AL-17-50-0-C*	UV Black	Nylon 66	17.87/454.02	0.18/4.69	0.05/1.39	5.08/129.00	50/222	-40 to 185		Type 21S		AH-2	100	5,000
AL-21-50-9-C*	Natural	Nylon 66	21.62/549.27	0.18/4.69	0.05/1.39	6.30/160.00	50/222	-40 to 185		Type 21S		AH-2	100	1,000
AL-21-50-0-C*	UV Black	Nylon 66	21.62/549.27	0.18/4.69	0.05/1.39	6.30/160.00	50/222	-40 to 185		Type 21S		AH-2	100	1,000

*17" and 21" COO: CN

STANDARD CABLE TIES

CLASS C COMPONENTS

6825 SUNWOOD DRIVE N.W. RAMSEY, MN 55303
PH 763-535-0400 FAX 763-535-1400



ISO 9001 Certified Company
www.classccomponents.com
Quality • Service • Versatility



ADVANCED CABLE TIES, INC.

LIGHT HEAVY DUTY CABLE TIES - 120 LB.



Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-08-120-9-C	Natural	Nylon 66	8.70/220.98	0.30/7.62	0.07/1.93	2.06/52.32	120/534	-40 to 185		Type 21S	Type 21S	AH-2	100	3,000
AL-08-120-0-C	UV Black	Nylon 66	8.70/220.98	0.30/7.62	0.07/1.93	2.06/52.32	120/534	-40 to 185		Type 21S	Type 21S	AH-2	100	3,000
AL-14-120-9-C	Natural	Nylon 66	14.82/376.63	0.30/7.62	0.07/1.93	4.06/103.12	120/534	-40 to 185	MS3367-3-9	Type 21S	Type 21S	AH-2	100	2,000
AL-14-120-9-L	Natural	Nylon 66	14.82/376.63	0.30/7.62	0.07/1.93	4.06/103.12	120/534	-40 to 185	MS3367-3-9	Type 21S	Type 21S	AH-2	50	2,000
AL-14-120-0-C	UV Black	Nylon 66	14.82/376.63	0.30/7.62	0.07/1.93	4.06/103.12	120/534	-40 to 185	MS3367-3-0	Type 21S	Type 21S	AH-2	100	2,000
AL-14-120-0-L	UV Black	Nylon 66	14.82/376.63	0.30/7.62	0.07/1.93	4.06/103.12	120/534	-40 to 185	MS3367-3-0	Type 21S	Type 21S	AH-2	50	2,000
AL-18-120-9-L	Natural	Nylon 66	18.25/463.55	0.30/7.62	0.08/2.10	5.00/127.00	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	1,000
AL-18-120-0-L	UV Black	Nylon 66	18.25/463.55	0.30/7.62	0.08/2.10	5.00/127.00	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	1,000
AL-24-120-9-L	Natural	Nylon 66	24.50/622.30	0.30/7.62	0.08/2.10	7.00/177.80	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	500
AL-24-120-0-L	UV Black	Nylon 66	24.50/622.30	0.30/7.62	0.08/2.10	7.00/177.80	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	500
AL-30-120-9-L	Natural	Nylon 66	30.87/784.22	0.30/7.62	0.08/2.10	9.00/228.60	120/534	-40 to 185	MS3367-6-9	Type 21S	Type 21S	AH-2	50	500
AL-30-120-0-L	UV Black	Nylon 66	30.87/784.22	0.30/7.62	0.08/2.10	9.00/228.60	120/534	-40 to 185	MS3367-6-0	Type 21S	Type 21S	AH-2	50	500
AL-36-120-9-L	Natural	Nylon 66	37.12/942.97	0.30/7.62	0.08/2.10	11.00/279.40	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	500
AL-36-120-0-L	UV Black	Nylon 66	37.12/942.97	0.30/7.62	0.08/2.10	11.00/279.40	120/534	-40 to 185		Type 21S	Type 21S	AH-2	50	500

HEAVY DUTY CABLE TIES - 175 LB.



Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-24-175-9-L	Natural	Nylon 66	25.50/647.70	0.34/8.63	0.09/2.28	7.18/182.30	175/778	-40 to 185	MS3367-10-0	Type 21*	Type 21	AH-2	50	500
AL-24-175-0-L	UV Black	Nylon 66	25.50/647.70	0.34/8.63	0.09/2.28	7.18/182.30	175/778	-40 to 185	MS3367-10-0	Type 21*	Type 21	AH-2	50	500
AL-36-175-9-L	Natural	Nylon 66	37.25/946.15	0.34/8.63	0.09/2.28	11.00/279.40	175/778	-40 to 185	MS3367-13-9	Type 21*	Type 21	AH-2	50	500
AL-36-175-0-L	UV Black	Nylon 66	37.25/946.15	0.34/8.63	0.09/2.28	11.00/279.40	175/778	-40 to 185	MS3367-13-0	Type 21*	Type 21	AH-2	50	500
AL-48-175-8-L	Gray	Nylon 66	48.56/1,233.47	0.34/8.63	0.09/2.28	14.50/368.30	175/778	-40 to 185	MS3367-16-8	Type 21*	Type 21	AH-2	50	500
AL-48-175-9-L	Natural	Nylon 66	48.56/1,233.47	0.34/8.63	0.09/2.28	14.50/368.30	175/778	-40 to 185	MS3367-16-9	Type 21*	Type 21	AH-2	50	500
AL-48-175-0-L	UV Black	Nylon 66	48.56/1,233.47	0.34/8.63	0.09/2.28	14.50/368.30	175/778	-40 to 185	MS3367-16-0	Type 21*	Type 21	AH-2	50	500

*Also rated UL 181B-C for HVAC.

EXTRA HEAVY DUTY CABLE TIES - 250 LB.



Part Number	Color	Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Bundle Diameter Inch/mm	Tensile Strength lb./n.	Operating Temp. °F Min./Max.	MIL-SPEC	UL	CSA	Plenum Rating	Per Bag	Per Case
AL-15-250-9-C	Natural	Nylon 66	14.93/379.42	0.47/12.11	0.07/1.95	4.07/103.50	247/1100	-40 to 185		Type 21		AH-2	100	1,000
AL-15-250-0-C	UV Black	Nylon 66	14.93/379.42	0.47/12.11	0.07/1.95	4.07/103.50	247/1100	-40 to 185		Type 21		AH-2	100	1,000
AL-22-250-9-C	Natural	Nylon 66	22.87/581.02	0.48/12.21	0.07/1.95	6.61/168.00	247/1100	-40 to 185		Type 21		AH-2	100	500
AL-22-250-0-C	UV Black	Nylon 66	22.87/581.02	0.48/12.21	0.07/1.95	6.61/168.00	247/1100	-40 to 185		Type 21		AH-2	100	500

COO: CN